


# 2019

## Products Catalogue

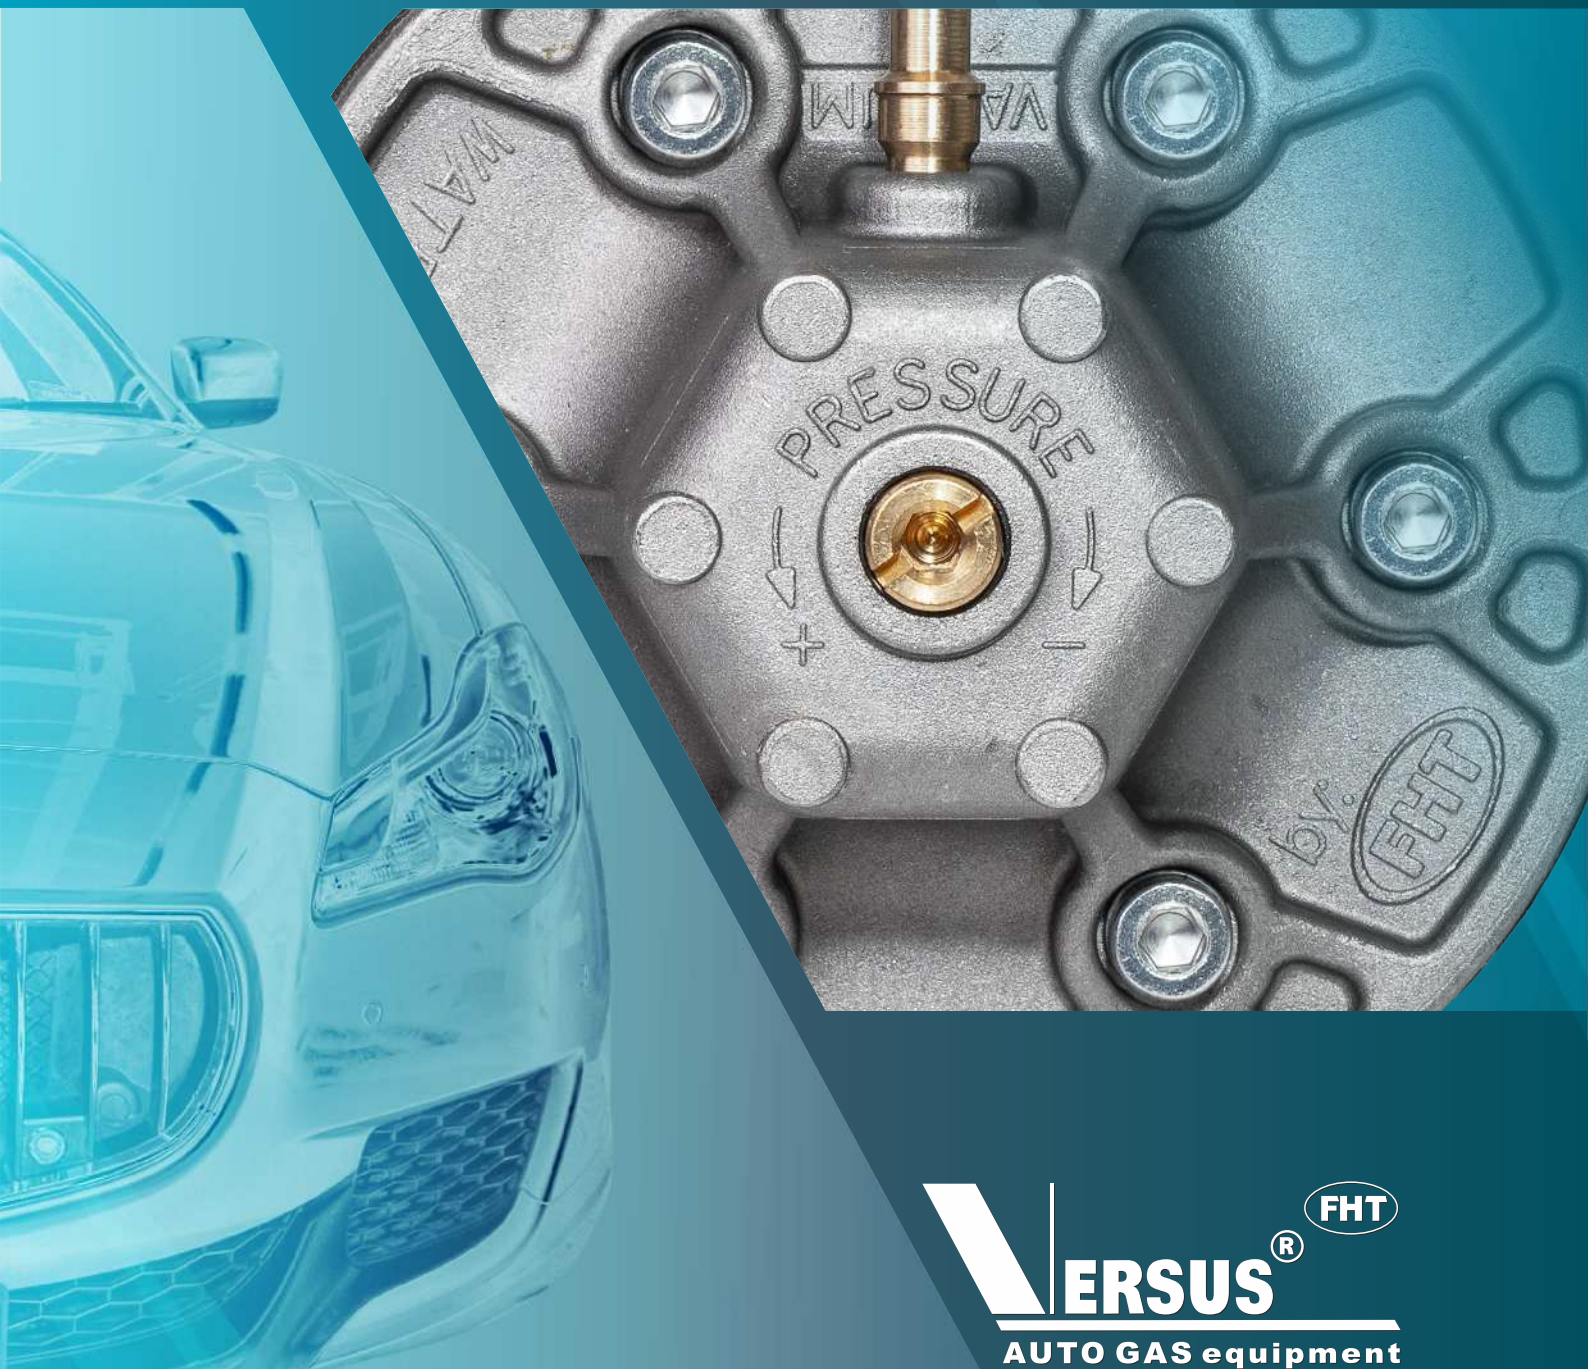

**VERSUS**<sup>®</sup> **FHT**  
AUTO GAS equipment

# Welcome!

We are designer, manufacturer and supplier of components and solutions for alternative fuels in the area of Gas Injection Systems automotive conversions.

From this catalogue you will learn about our range of products we have on offer.

**FHT VERSUSGAS** offers conversion kits for vehicles both for **LPG** as well as **CNG** fuel.

Controllers



Reducers



Injectors



Installation KIT's



Software



**VERSUS**<sup>®</sup> **FHT**  
AUTO GAS equipment

# V-controller

High quality ECU

Part no.: EL.V4.OBD / EL.V6.OBD / EL.V8.OBD

Our V-series controllers contain the most advanced technology available today. We adopted proven, high-performance components and incorporated unique system solutions into our products. We ensure strict quality control on every stage of production process.

All V-controllers are equipped with powerful microprocessor which supports the built-in automatic correction system. This permits the controller to perfect parameters of the CNG/LPG injection in order to use it in any vehicle.


**SCS** Self-Calibration System

**DSP** Digital Signal Processing

## Main features:

- Up to 70 MIPS DSP processor
- Aluminium housing
- Self-Calibration system supports automatic correction adjustments
- OBD communication available
- Integrated short-circuit protection
- Self-diagnostics and troubleshooting system
- 2x24 PIN connector
- Dimensions: 138 x 133,5 x 38 mm / 5.4 x 5.2 x 1.5 in

Available for 4 ,6, 8-cylinder engines

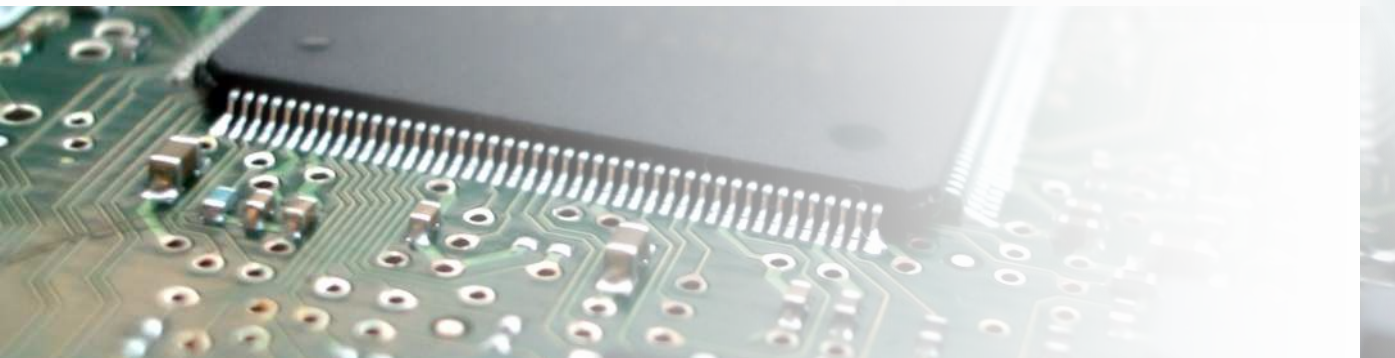

[www.versusgas.com](http://www.versusgas.com)

+48 25 759 42 61

[info@versusgas.com](mailto:info@versusgas.com)

**VERSUS**<sup>®</sup> **FHT**  
AUTO GAS equipment

FHT Export-Import  
ul. Szczecinska 16G  
05-300 Minsk Mazowiecki, POLAND

# VR-L Super

Super-charged LPG reducer up to 300 HP engine power

Part no.: RD.VLS.B

We designed VR-L Super reducer for the most sophisticated engines with high-efficiency output. This reducer is supplied with advanced Liquid Gas Heating System which ensures stable pressure regardless of system temperature. It also has Coil Group Valve built-in so there is no need to install another valve separately.

**300 HP**  
Maximum Power

**LGHS**  
Liquid Gas Heating System

**CFD** Designed using  
Computational Fluid Dynamics

## Main features:

- LPG gas type
- Aluminium alloy die cast
- Liquid Gas Heating System
- Working pressure: 1,2 bar (17.4 psi)
- Maximum power: 220 kW (300 HP)
- Working temperature range: -30/+120 °C (-22/+250 °F)
- LPG outlet external diameter: 14 mm
- LPG inlet diameter: 8 mm
- Engine coolant outlet/inlet diameter: 16 mm
- Supplied shut-off valve
- Dimensions: 135x 190x 130 mm / 5.3x7.5x5.1 in
- Body diameter: 100 mm / 4 in
- Dry weight: 1,9 kg (4.2 lbs)
- Approvals: ECE67R01
- **Aluminium water outlet/inlet** available



[www.versusgas.com](http://www.versusgas.com)

+48 25 759 42 61

[info@versusgas.com](mailto:info@versusgas.com)

**VERSUS**<sup>®</sup> FHT  
AUTO GAS equipment

FHT Export-Import  
ul. Szczecińska 16G  
05-300 Minsk Mazowiecki, POLAND

# VR-L Standard

Advanced LPG reducer for vehicles up to 200 HP

Part no.: RD.VL.B

The latest VR-L Standard reducer is designed according to the modern technological advances. Due to that factor, the most efficient temperature exchange values as well as optimal pressure performance are obtained. This has been proved by testing it in extreme conditions. The VR-L Standard reducer comes equipped with LPG solenoid, so there is no need to instal an additional valve. This hepls saving space in the engine compartment.

**200 HP**  
Maximum Power



Low-temperature optimized

**CFD**

Designed using  
Computational Fluid Dynamics

## Main features:

- LPG gas type
- Aluminium alloy die cast
- Working pressure: 1 bar (14.5 psi)
- Maximum power: 150 kW (200 HP)
- Working temperature range: -30/+120 °C (-22/+250 °F)
- LPG outlet external diameter: 12 mm
- LPG inlet diameter: 6 mm
- Engine coolant outlet/inlet diameter: 16 mm
- Supplied shut-off valve
- Dimensions: 135x 190x 130 mm / 5.3x7.5x5.1 in
- Body diameter: 100 mm / 4 in
- Dry weight: 1,45 kg (3.2 lbs)
- Approvals: ECE67R01



- Aluminium water outlet/inlet available



[www.versusgas.com](http://www.versusgas.com)

+48 25 759 42 61

[info@versusgas.com](mailto:info@versusgas.com)

**VERSUS**<sup>®</sup>  
AUTO GAS equipment

FHT

FHT Export-Import  
ul. Szczecinska 16G  
05-300 Minsk Mazowiecki, POLAND

# VRC-Tauros

Dedicated reducer for Sequential CNG Injection Systems

Part no.: RD.TAU.B

Tauros is high power, high performance pressure reducer dedicated to CNG Installations and can be installed in most types of vehicles. The reducer is equipped with sensitive 1-st stage reduction system that warrants stable output pressure regardless of any pressure variation coming from the tank. Thanks to its highly efficient two-stage gas flow control system, the most optimal CNG dosage is achieved in any driving condition.

**250 HP**  
Maximum Power

**CNG**  
CNG optimized

**CFD** Designed using  
Computational Fluid Dynamics

## Main features:

- CNG gas type
- Aluminium alloy die cast
- Working pressure: 1,0-2,5 bar (14.5-36.3 psi)
- Maximum power: 180 kW (250 HP)
- Working temperature range: -30/+120 °C (-22/+250 °F)
- CNG outlet external diameter: 12 mm
- Engine coolant outlet/inlet diameter: 8 mm
- Supplied low-pressure shut-off valve
- Dimensions: 164 x 125 x 105 mm / 6.5 x 4.9 x 4.1 in
- Dry weight: 1,2 kg (2.6 lbs)
- Approvals: ECE110R00, ISO 15500-9



[www.versusgas.com](http://www.versusgas.com)

+48 25 759 42 61

[info@versusgas.com](mailto:info@versusgas.com)

**VERSUS**<sup>®</sup> **FHT**  
AUTO GAS equipment

FHT Export-Import  
ul. Szczecinska 16G  
05-300 Minsk Mazowiecki, POLAND

# Lynx

Compact & clean LPG reducer for small engines.

Part no.: RD.LX.BASIC

Thanks to a special lever system this reducer is characterized by very high resistance for any kind of dirtiness which comes from gas. Optimized gas flow guarantees high performance of this small device. Lynx weighs less than 1 kg. The reducer is equipped with internal gas filter and electrovalve, which makes its construction more compact. Small dimensions are obvious advantage for the installers as it allows to fix the reducer even in the smallest engine's chambers.



Lightweight and compact



Low-temperature optimized




Designed using  
Computational Fluid Dynamics

## Main features:

- LPG gas type
- Aluminium alloy die cast
- Working pressure: 1 bar (14.5 psi)
- Maximum power: 110 kW (150 HP)
- Working temperature range: -30/+120 °C (-22/+250 °F)
- LPG outlet external diameter: 12 mm
- LPG inlet diameter: 6 mm
- Engine coolant outlet/inlet diameter: 16 mm
- Supplied shut-off valve
- Dimensions: 93,5 x 138 x 130 mm / 3.7 x 5.4 x 5.1 in
- Body diameter: 70 mm / 2.8 in
- Dry weight: 0,97 kg (3.2 lbs)
- Approvals: ECE67R01



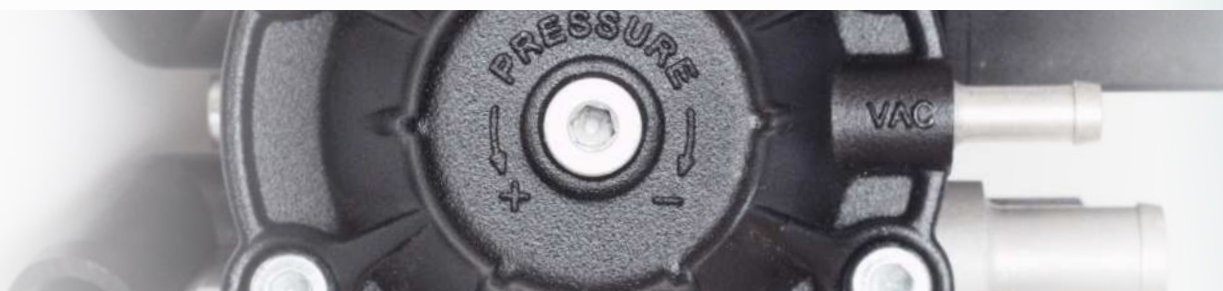

- Aluminium water outlet/inlet available



[www.versusgas.com](http://www.versusgas.com)

+48 25 759 42 61

[info@versusgas.com](mailto:info@versusgas.com)

 **VERSUS**<sup>®</sup>   
AUTO GAS equipment

FHT Export-Import  
ul. Szczecińska 16G  
05-300 Minsk Mazowiecki, POLAND

# FH-Razor

High performance LPG/CNG injection system

Part no.: LWR.1

Precision made of stainless steel, combined with fluoropolymer elastomer for excellent durability and ever-lasting cleanliness. Rated down to -40 degrees Celcius. FH-Razor real-world performance actually surpass every other gas supply system on the market.

Sophisticated but ingeniously simple internal design ensures parameters consistency and reliability you can always count on. Top-feed topology results in low pressure loss combined with high flow rates. Newly developed, highly optimized linear actuators provide razor-sharp injection timings and lightning fast operation.



Top Feed



Synthetic Fluopolymer  
Coating



Low-temperature  
optimized



High-speed  
operation

## Main features:

- Power supply: 10 - 16 V DC
- Maximum flow rate (without nozzle) 130 l/min
- Operational temperature range: -40 / +125 °C
- Gas compatibility: LPG / CNG
- Maximum opening current: 4.5 A / duration 2.8 ms
- Maximum holding current: 1.5 A
- Working pressure range: 0.0 - 4.0 Bar
- Plunger coating: anti stick, antifreeze
- Sealing on piston: fluo-polimer
- Bumper rubber: fluo-polimer
- Opening time: 1.85 ms +/- 0.05 ms
- Closing time: 0.9 ms +/- 0.1 ms
- Input filter: 120 mesh
- Brass nozzles for selecting the injector flow (nominal nozzle)
- Adapter length: 94,5 mm
- Maximum adapter diameter: 28 mm
- Calibration nozzle nominal diameter: 1.5 mm
- Adapter weight: 106 g

## Versatile configuration:

- **Gas distributor** for 2/3/4 cylinders



- **Single adapters** to connect with Gas distributor




- **Distribution rail** for 2/3/4 cylinders



[www.versusgas.com](http://www.versusgas.com)

+48 25 759 42 61

[info@versusgas.com](mailto:info@versusgas.com)

 **VERSUS**<sup>®</sup>  
AUTO GAS equipment

FHT

FHT Export-Import  
ul. Szczecinska 16G  
05-300 Minsk Mazowiecki, POLAND



# FH-02

Versatile LPG/CNG injection system

Part no.: LW.1 / LW.2 / LW.3 / LW.4

Standard injection system for economical gas installations. Modular design allows it to be mounted in many ways.

## Types available:

FH02 4-cyl - dedicated to 4-cyl & 8-cyl engines, 4 injection channels.  
FH02 3-cyl - dedicated to 3-cyl & 6-cyl engines, 3 injection channels.  
FH02 2-cyl - dedicated to 4-cyl boxer engines, 2 injection channels.  
Fh02 1-cyl - dedicated to engines with advanced inlet manifold systems.

## Main features:

- Power supply: 12V DC
- Operational temperature range: -30 / +120 °C (-22 / +250 °F)
- Gas compatibility: LPG / CNG
- Working pressure range: 0,5 - 2,5 bar (7.25 - 36.25 psi)
- Maximum allowable pressure: 4,5 bar (65 psi)
- Coil resistance: 3 Ohm +/- 4%
- Body: aluminum (FH02-4, FH02-3, FH02-2) / brass (FH02-1)
- Opening time: 3,0 ms
- Closing time: 2,5 ms
- LPG / CNG inlet external diameter: 12 mm
- Standard valve seat diameter: 3,3 mm
- Calibration nozzle sizes available: 1,5 – 3,5 mm (0,25 mm step)
- Normally closed
- Single adapter length: 77,5 mm
- Adapter weight: 104 g
- Approvals: ECE 67R01, ECE110R00



## Versatile configuration:

### ■ Single channel adapters



### ■ Distribution rail for 2/3/4 channels



[www.versusgas.com](http://www.versusgas.com)

+48 25 759 42 61

[info@versusgas.com](mailto:info@versusgas.com)

 **VERSUS**<sup>®</sup>   
AUTO GAS equipment

FHT Export-Import  
ul. Szczecinska 16G  
05-300 Minsk Mazowiecki, POLAND

# Mini / Maxi KIT

## LPG / CNG installation bundles

FHT VERSUSGAS offers conversion kits for vehicles both for **LPG** as well as **CNG** fuel.

Each **Maxi KIT** contains **Mini KIT** components plus all necessary mounting parts.

We offer broad range of proprietary installation KITS for 4-6-8 cylinder engines in various configurations and power ratings.

### Main parts of LPG conversion KIT



V-Controller ECU



Standard VR-L reducer



FH02 injectors



High-power VR-L Super reducer

We offer full assortment of Gas installation parts and accessories.  
Detailed catalogue will be sent upon the request.  
For more details please contact us:

**Orders:** [trade@versusgas.com](mailto:trade@versusgas.com)

**Inquiries** [info@versusgas.com](mailto:info@versusgas.com)


**Website:** [www.versusgas.com](http://www.versusgas.com)

FHT Versus Gas reserves the right to make any modification/improvement into its products at any time on the basis of its own assessment, without prior notice. The pictures, descriptions, product codes, technical data that are contained in this catalog are the property of FHT Versus Gas. Copying of this property is prohibited without prior written permission.

[www.versusgas.com](http://www.versusgas.com)

| +48 25 759 42 61

| [info@versusgas.com](mailto:info@versusgas.com)

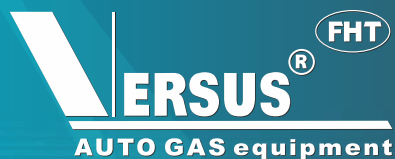**VERSUS**<sup>®</sup> FHT  
AUTO GAS equipment

FHT Export-Import  
ul. Szczecinska 16G  
05-300 Minsk Mazowiecki, POLAND